




LAL/LALxE/LALC SERIES

CATALOG LOGIC

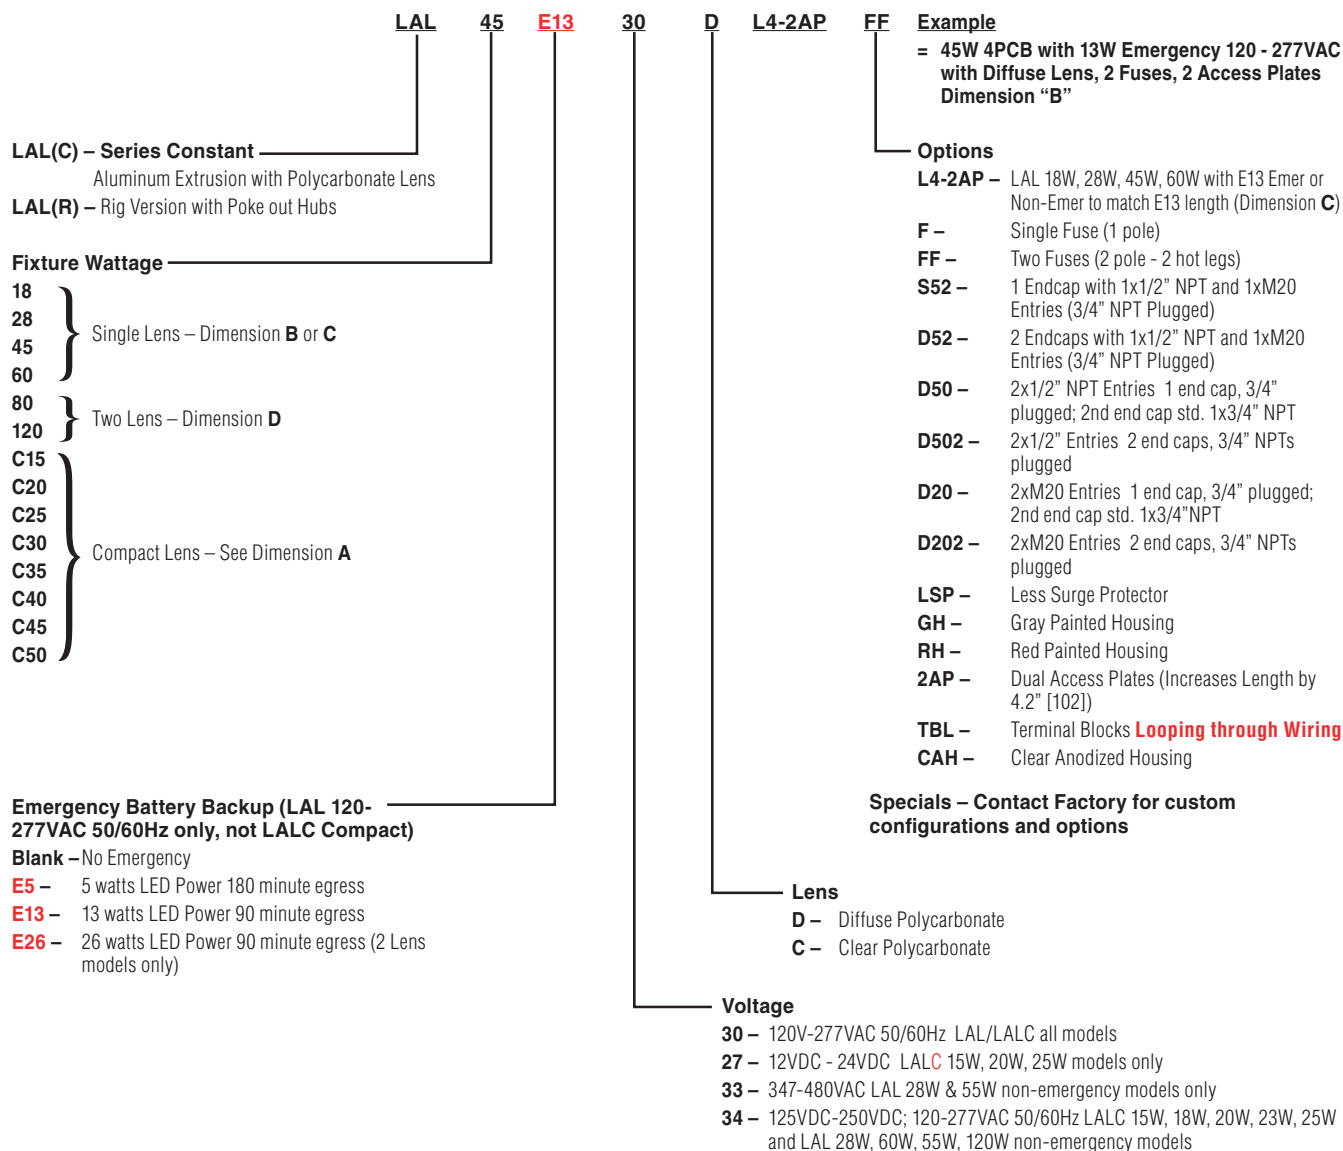

Energy Savings

LED VS FLUORESCENT WATTAGE & DELIVERED LUMENS					
CATALOG NUMBER	LUMENS	L/W	FLUORESCENT		L/W
LAL1830C	2479	138	40W	1x40W BX	63
LAL2830C	3624	129	55W	1x55W BX	65
LAL4530C	5515	122	56W	2x28T5	71
			64W	2x32T8	80
LAL6030C	7709	128	108W	2x54T5HO	67
			120W	2x60T12HO	56
LAL8030C	11032	138	162W	3x54T5HO	65

LIGHTING

LAL/LALxE/LALC SERIES



ORDERING INFORMATION

ORDERING INFORMATION AND AMBIENT SUITABILITY							C1D2 ABCD/ ZONE 2 IIC, IIB, IIA			C1D2 GRPS. EFG SIMULTANEOUS			C2D1 GRPS. EFG			IEC ZONE 2			IEC ZONE 21		
CATALOG NUMBER W/ DIFFUSE LENS	WEIGHT LBS./KG	WATTS STD. POWER	LENGTH STYLE - INCHES (MM)	VOLTAGE	AMPS	DELIVERED LUMENS Diffuse/ Clear	40°C	55°C	65°C	40°C	55°C	65°C	40°C	55°C	65°C	40°C	55°C	65°C	40°C	55°C	65°C
LAL1830D	17.9 / 8.1	18	B-32.6 (828)	120-277VAC	0.15 - 0.06	2272 / 2479	T6	T6	T5	T4A	T4A	T4A	T4A	T4A	T4A	T6	T6	T5	T4	T4	T4
LAL1830D-L4-2AP	21.9 / 9.9		C-51 (1295)																		
LAL18E1330D-L4-2AP	31.9 / 14.5		C-51 (1295)																		
LAL2830D	17.9 / 8.1	28	B-32.6 (828)		0.23 - 0.10	3321 / 3624	T6	T6	T5	T4A	T4A	T4A	T4A	T4A	T4A	T6	T6	T5	T4	T4	T4
LAL2830D-L4-2AP	21.9 / 9.9		C-51 (1295)																		
LAL28E1330D-L4-2AP	31.9 / 14.5		C-51 (1295)																		
LAL4530D	17.9 / 8.1	45	B-32.6 (828)		0.38 - 0.16	5054 / 5515	T6	T5	-	T4A	T4A	T4A	T4A	T4A	T4A	T6	T5	T5	T4	T4	T4
LAL4530D-L4-2AP	21.9 / 9.9		C-51 (1295)																		
LAL45E1330D-L4-2AP	31.9 / 14.5		C-51 (1295)																		
LAL6030D	18.9 / 8.6	60	B-32.6 (828)		0.50 - 0.22	7064 / 7709	T6	T5	-	T4A	T4A	-	T4A	T4A	-	T6	T5	-	T4	T4	-
LAL6030D-L4-2AP	22.9 / 10.4		C-51 (1295)																		
LAL60E1330D-L4-2AP	32.9 / 14.9		C-51 (1295)																		
LAL8030D	34.5 / 15.6	80	D-57.9 (1471)	120-277VAC	0.67 - 0.29	10110 / 11032	T6	T5	-	T4A	T4A	-	T4A	T4A	-	T6	T5	-	T4	T4	-
LAL80E1330D	44.5 / 20.2		D-57.9 (1471)																		
LAL80E2630D	54.5 / 24.7		D-57.9 (1471)																		
LAL12030D	36.5 / 16.6	120	D-57.9 (1471)		1.00 - 0.43	15090 / 16467	T6	T5	-	T4A	T4A	-	T4A	T4A	-	T6	T5	-	T4	T4	-
LAL120E1330D	46.5 / 21.1		D-57.9 (1471)																		
LAL120E2630D	56.5 / 25.6		D-57.9 (1471)																		
LALC1527D	12.03 / 4.49	15	A-18.73 (476)	12-24VDC	1.3-0.6	1503 / 1640															
LALC1530D				120-277VAC	0.15-0.06		T5	T4A	-	T4A	T4A	-	T4A	T4A	-	T5	T4	-	T4	T4	-
LALC1534D				120-250VDC	0.2-0.1																
LALC2027D		20	A-18.73 (476)	12-24VDC	1.7-0.8	2337 / 2550															
LALC2030D				120-277VAC	0.17-0.08		T5	T5	-	T4A	T4A	-	T4A	T4A	-	T5	T5	-	T4	T4	-
LALC2034D				120-250VDC	0.2-0.1																
LALC2527D		25	A-18.73 (476)	12-24VDC	2.1-1.0	3019 / 3294															
LALC2530D				120-277VAC	0.18-0.08		T5	T4A	-	T4A	T4A	-	T4A	T4A	-	T5	T4	-	T4	T4	-
LALC2534D				120-250VDC	0.2-0.1																
LALC3030D		30	A-18.73 (476)	120-277VAC	0.26-0.11	2726 / 2974	T5	T4A	-	T4A	T4A	-	T4A	T4A	-	T5	T4	-	T4	T4	-
LALC3530D		35	A-18.73 (476)		0.30-0.13	3261 / 3558	T5	T4A	-	T4A	T4A	-	T4A	T4A	-	T5	T4	-	T4	T4	-
LALC4030D		40	A-18.73 (476)		0.34-0.15	4152 / 4530	T5	T5	-	T4A	T4A	-	T4A	T4A	-	T5	T5	-	T4	T4	-
LALC4530D		45	A-18.73 (476)		0.38-0.17	5136 / 5604	T5	T5	-	T4A	T4A	-	T4A	T4A	-	T5	T5	-	T4	T4	-
LALC5030D		50	A-18.73 (476)		0.42-0.18	6039 / 6590	T5	-	-	T4A	-	-	T4A	-	-	T5	-	-	T4	-	-