


LED Industry Lighting

LED Platfrom Light/LED Emergency Light

30W / 45W / 60W / 80W

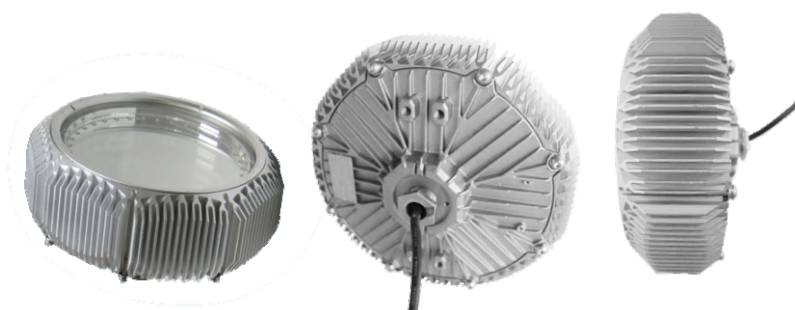

Features

- Osram led source,high lumen output over 140lm/W.
- 360° annular led light source distribu-tion,anti-galre.
- Extruded Cooper-free Aluminum,high intensity,can endure 20J impact.
- Own design and produced LED drivers are provide reliable operation in harsh environments.
- Capable to work on extreme high and low temperature -45°C~+60°C,keep good performance.
- IP66 and high corrosion resistance, can be used in ocean enviroment.
- Lightning protection 6KV, THD≤10%.

Applications


- Ideal for oil and gas industry,refineries,onshore and offshore rigs,pumping station,oil tank, petrochemical plants,mining,power generation,wharf and loading docks,etc.

LED lights-Leopad	30W	45W	60W	80W
Lumen output (lm)	3600	4800	6000	8000
HID/HPS Equiv (approx)	50/70W	70W	100/150W	150/175W


Technical parameters

Power consumption	30W	45W	60W	80W
Item No.	BLP30	BLP45	BLP60	BLP80
Input voltage & frequency	AC 100-277V / 50-60Hz	AC 100-277V / 50-60Hz	AC 100-277V / 50-60Hz	AC 100-277V / 50-60Hz
Input current	100~330mA	150~500mA	200~660mA	260~880mA
Power factor (PF)	≥ 0.98	≥ 0.98	≥ 0.98	≥ 0.98
LED chips	OSRAM	OSRAM	OSRAM	OSRAM
Luminous Flux	3600lm	4800lm	6000lm	8000lm
Colour rendering index (CRI)	Ra >70	Ra >70	Ra >70	Ra >70
Colour temperature	WW:2800~3300K PW:4700~5400K CW:5700~7100K	WW:2800~3300K PW:4700~5400K CW:5700~7100K	WW:2800~3300K PW:4700~5400K CW:5700~7100K	WW:2800~3300K PW:4700~5400K CW:5700~7100K
Beam angle	40°/80°/120°	40°/80°/120°	40°/80°/120°	40°/80°/120°
Working ambient temp.	-45°C~ +60°C	-45°C~ +60°C	-45°C~ +60°C	-45°C~ +60°C
IP Grade	IP66	IP66	IP66	IP66
Lifspan	≥ 50,000 hrs	≥ 50,000 hrs	≥ 50,000 hrs	≥ 50,000 hrs
Housing	Copper free Aluminium	Copper free Aluminium	Copper free Aluminium	Copper free Aluminium
Front Cover	Tempered glass	Tempered glass	Tempered glass	Tempered glass
Demensions	Φ258*80mm	Φ258*80mm	Φ258*80mm	Φ258*80mm
Weight	3.5kg	3.5kg	3.5kg	3.5kg
Warranty	3 years	3 years	3 years	3 years

Distribution Curve

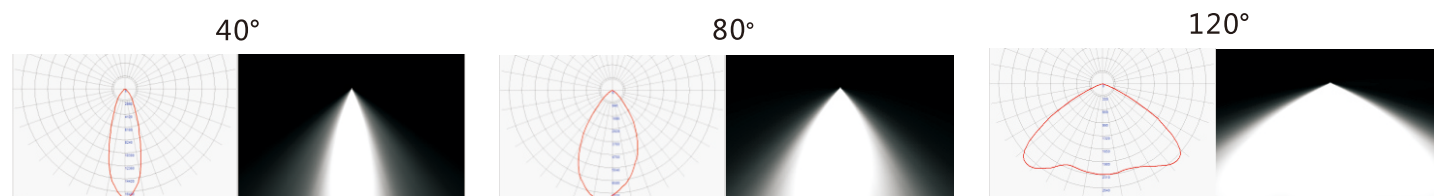

Installation

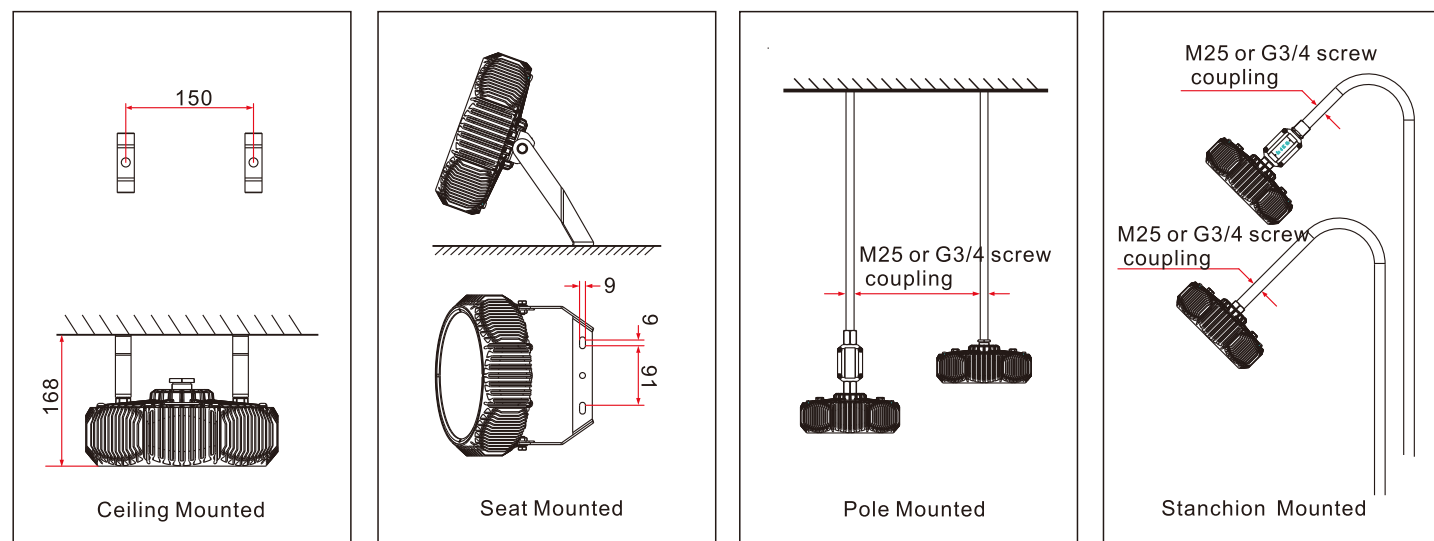

Mounting Accessories

	Installation form	Standard Parts	Description
	Ceiling Bracket	Including attachments: Ceiling bracket, 2Pcs; Screws, M8X12, 4Pcs; Spring washers, 4Pcs; Flat pad, 4Pcs	Fixed installation, no angle adjustment.
	Seat Bracket	Including attachments: Seat bracket, 1Pcs; Right angle bracket, 2Pcs; Screws, M8X12, 4Pcs; Hex screws, 2Pcs; Spring washers, 6Pcs; Flat pad, 6Pcs	Adjustable at any angle.
	Pole Joint	Including attachments: Compression nut, 1Pcs; Rubber filler, 1Pcs; Flat pad, 6Pcs	Suitable for the pole mounted and stanchion mounted. G3 / 4, M25, NPT3 / 4 available.

Ordering Information

Part number definition as follow:

B	LP	XXX	XX	XX
Brand	Series LP-Leopard	Power 030-30W 045-45W 060-60W 080-80W	Light Distribution D40-40° D80-80° D120-120°	CCTK CW-2800~3300K PW-4700~5400K WW-5700~7100K

For example: BLP080D120CW